



Eris® Pro 4

High-Definition Coaxial Monitors

Key Features

- Single point-source coaxial design for wider sweet spot and better phase alignment
- 4.5-inch woven composite low-frequency driver
- 1-inch, ultra-low mass, silk-dome, high frequency driver
- 80W, Class AB amplification
- 50 Hz to 20 kHz frequency response
- 99 dB Peak SPL (@ 1 meter)
- Acoustic Tuning Controls
- Wall and ceiling mountable



The **Eris Pro 4** reference monitors employ a single point-source coaxial design for clear and accurate sound reproduction. This design provides superior phase alignment between components and delivers a wide sweet spot, precise stereo imaging, and symmetrical dispersion patterns – unique advantages for Dolby Atmos immersive rooms as well as stereo mix environments.

The Eris Pro 4 also delivers finely detailed transient response, and stunning dynamics that create a natural and less fatiguing experience. A 1-inch ultra-low mass, silk-dome tweeter ensures snappy, accurate transient reproduction, while a 4.5-inch woven-composite woofer offers tight, clear bass, with plenty of punch and no flab. A ported enclosure and 80 Watts of power allows the Eris Pro 4 to reach down to 50 Hz.


Acoustic tuning controls let you configure the Eris Pro 4 for your room and three-way Acoustic Space tuning can compensate for the effects of speaker placement against a wall or in a corner.

Flexible input options let you connect almost any line-level source, from mixers to audio interfaces and more. You'll have no problem hooking your Eris speakers up to virtually anything. Lastly, provisions for wall and ceiling mounts make it easy to integrate Eris Pro 4 monitors into any stereo or multi-channel system.

Sold Individually.

Technical specifications

Frequency Response	50 Hz to 20 kHz
Peak SPL	99 dB (@ 1M)
LF Amplifier Power	45W, Class AB
HF Amplifier Power	35W, Class AB
LF Driver	4.5-inch woven composite
HF Driver	1-inch, silk-dome
Inputs (1 each)	Balanced XLR Balanced ¼-inch TRS Unbalanced RCA
Controls	Volume High Frequency Low Frequency Acoustic Space Low Cut Power Saver
Dims (H x W x D)	9.02" x 7.47" x 8.57" (229.1mm x 189.6mm x 217.6mm)
Weight	9.48 lbs (4.30 kg)

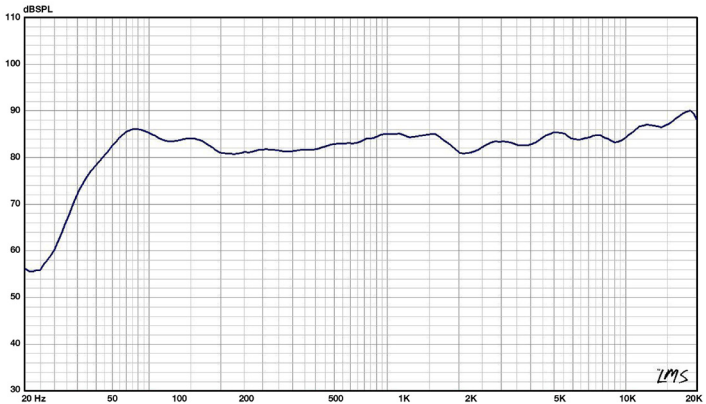

Part Number	Description	UPC Code
2777500129	ERIS PRO 4	673454011399
2777503129	ERIS PRO 4 AU	673454011405
2777504129	ERIS PRO 4 UK	673454011436
2777506129	ERIS PRO 4 EU	673454011412
2777507129	ERIS PRO 4 JP	673454011429
2777514129	ERIS PRO 4 MX	673454012129