


Specifications

Mains Power Supply	
Supply Voltage; frequency	100-120 V, 220-240 V; 50 Hz/60 Hz
Power Consumption	max. 25 W
Microphone Inputs	
Connector	2 x XLR 3 F
Input Impedance	approx. 3 kΩ
Minimum Gain	+20 dB (PAD off)
Maximum Gain	+60 dB (PAD off)
Attenuation PAD switchable	off/-20 dB
Maximum Input Level (PAD off)	+8 dBu
Maximum Input Level (PAD on)	+28 dBu
Power Supply (P48, IEC 61938)	48 V , max. 10 mA, switchable on/off
Hi-Z	
Hi-Z Input active	switchable on/off
Connector	jack 6.3 mm (1/4"), mono, unbalanced (front)
Input Impedance	3.3 MΩ
Maximum Input Level	+21 dBu
Minimum Gain	0 dB (PAD off)
Maximum Gain	+40 dB (PAD off)
Bargraphs	
per channel: -24 dBu to +24 dBu in 6 dB steps	
Peak Hold indication @ +24 dBu (hold time approx. 3 sec.)	
Headphone Output	
Mono / Stereo	switchable
Connector	jack 6.3 mm (1/4"), stereo (front)
Volume Control	for left & right channel + Master
Output Impedance	approx. 2 Ω
Maximum Output Voltage	+20 dBu into 150 Ω load impedance
Outputs	
Connector	2 x XLR 3 M
Output Impedance	approx. 200 Ω
Maximum Output Voltage	+26 dBu into 1 kΩ load impedance
Ground Lift	switchable on/off
Amplifier	
Frequency Range	<10 Hz to >100 kHz (-3 dB@ 40 dB Gain)
High Pass Filter (HPF, 60 Hz, 12 dB/oct)	switchable on/off
General	
Dimensions (H x W x D)	89 mm x 463 mm x 242 mm
Weight	6.2 kg
Operating Conditions	0°C to +50°C; < 75% RH@ +40°C; non-condensing
Transport/Storage Conditions	-25°C to +70°C; < 95% RH; non-condensing
Working Altitude	< 2000 m

A complete list of specifications can be found on the product page at www.neumann.com.


In the box

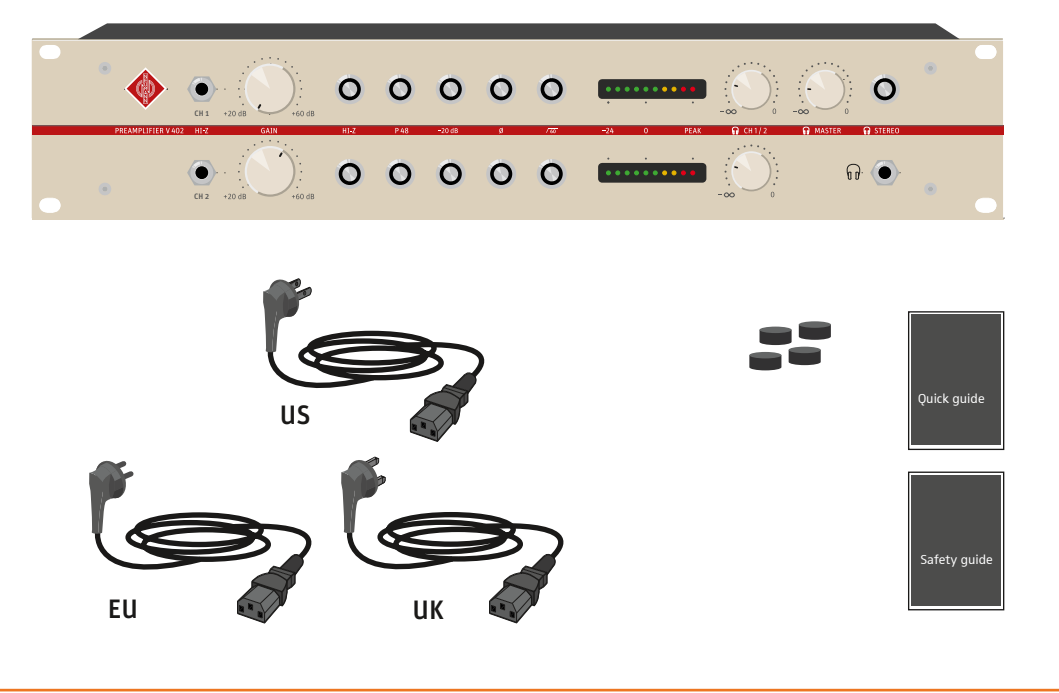

► NEUMANN.BERLIN


► V 402

- Quick Guide
- Kurzanleitung
- Guide de démarrage rapide
- Guida rapida
- Instrucciones resumidas
- Instruções resumidas
- Beknopte handleiding
- Krótka instrukcja obsługi
- Snabbguide
- Kort vejledning
- Pikaohje
- Γρήγορος οδηγός
- Kısa Kılavuz
- Краткая инструкция
- 简要说明

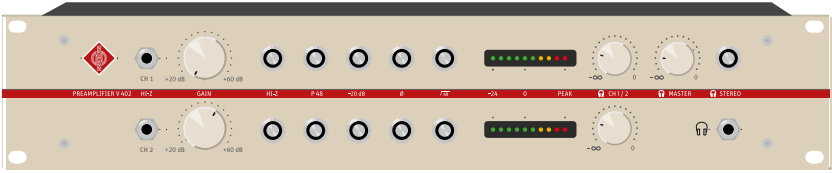


GEORG NEUMANN GMBH • LEIPZIGER STR. 112 • 10117 BERLIN • GERMANY
TEL +49 (0)30 / 41 77 24 -0 • FAX -50 • HEADOFFICE@NEUMANN.COM • WWW.NEUMANN.COM


Power

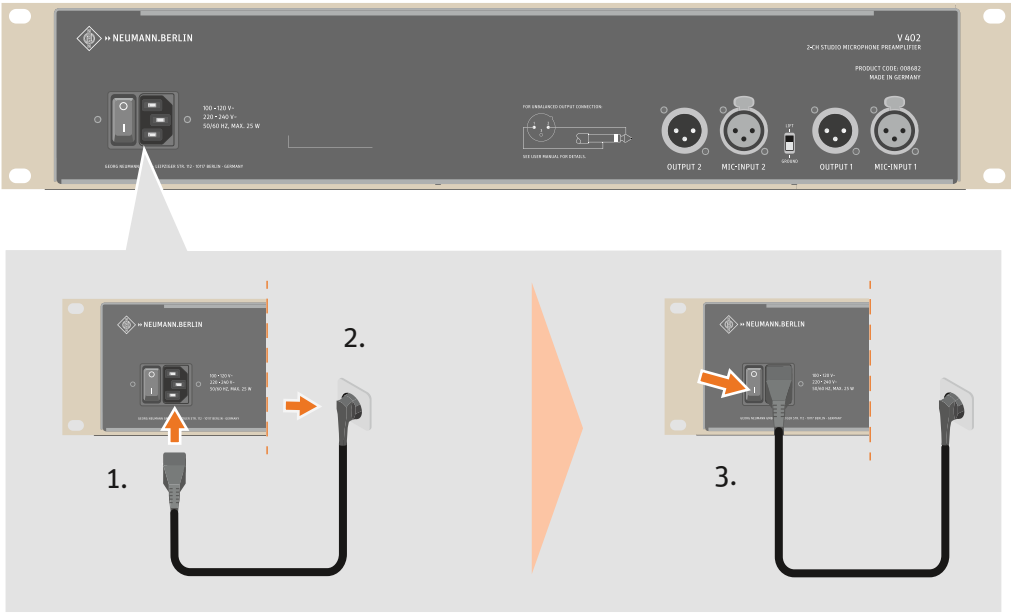

Setup

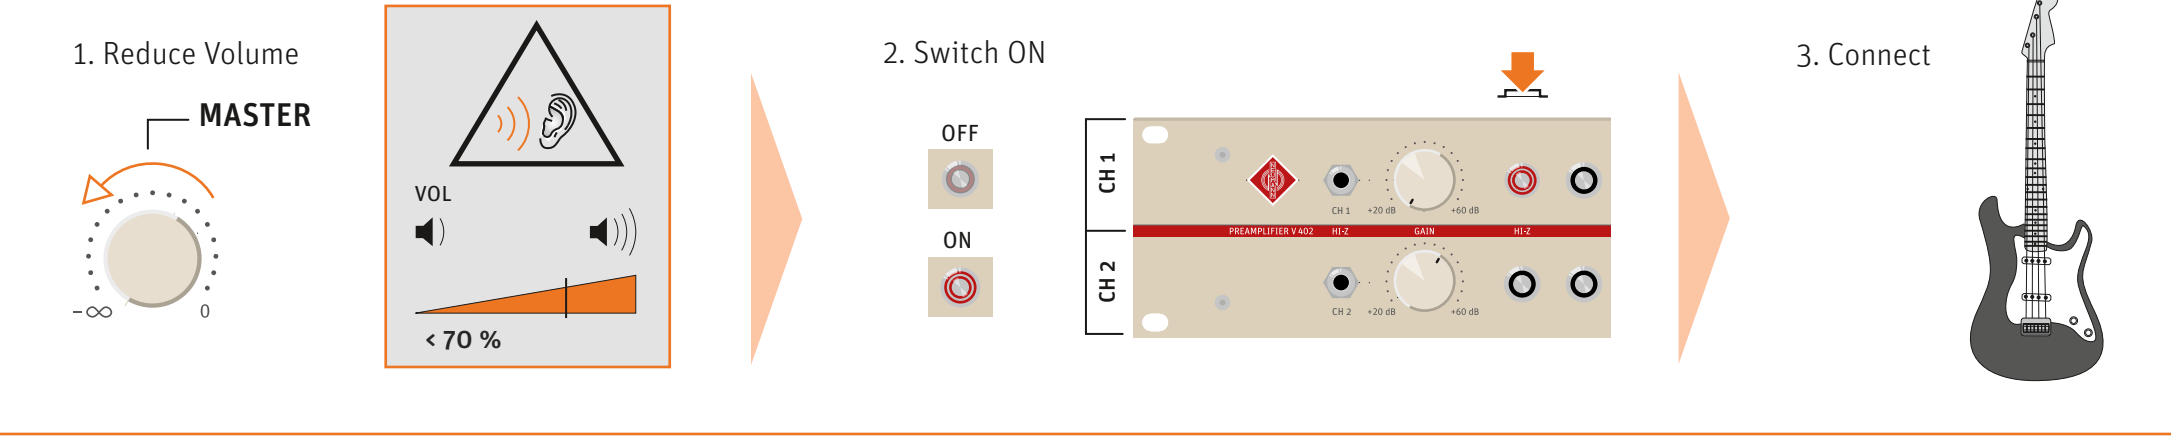

Controls

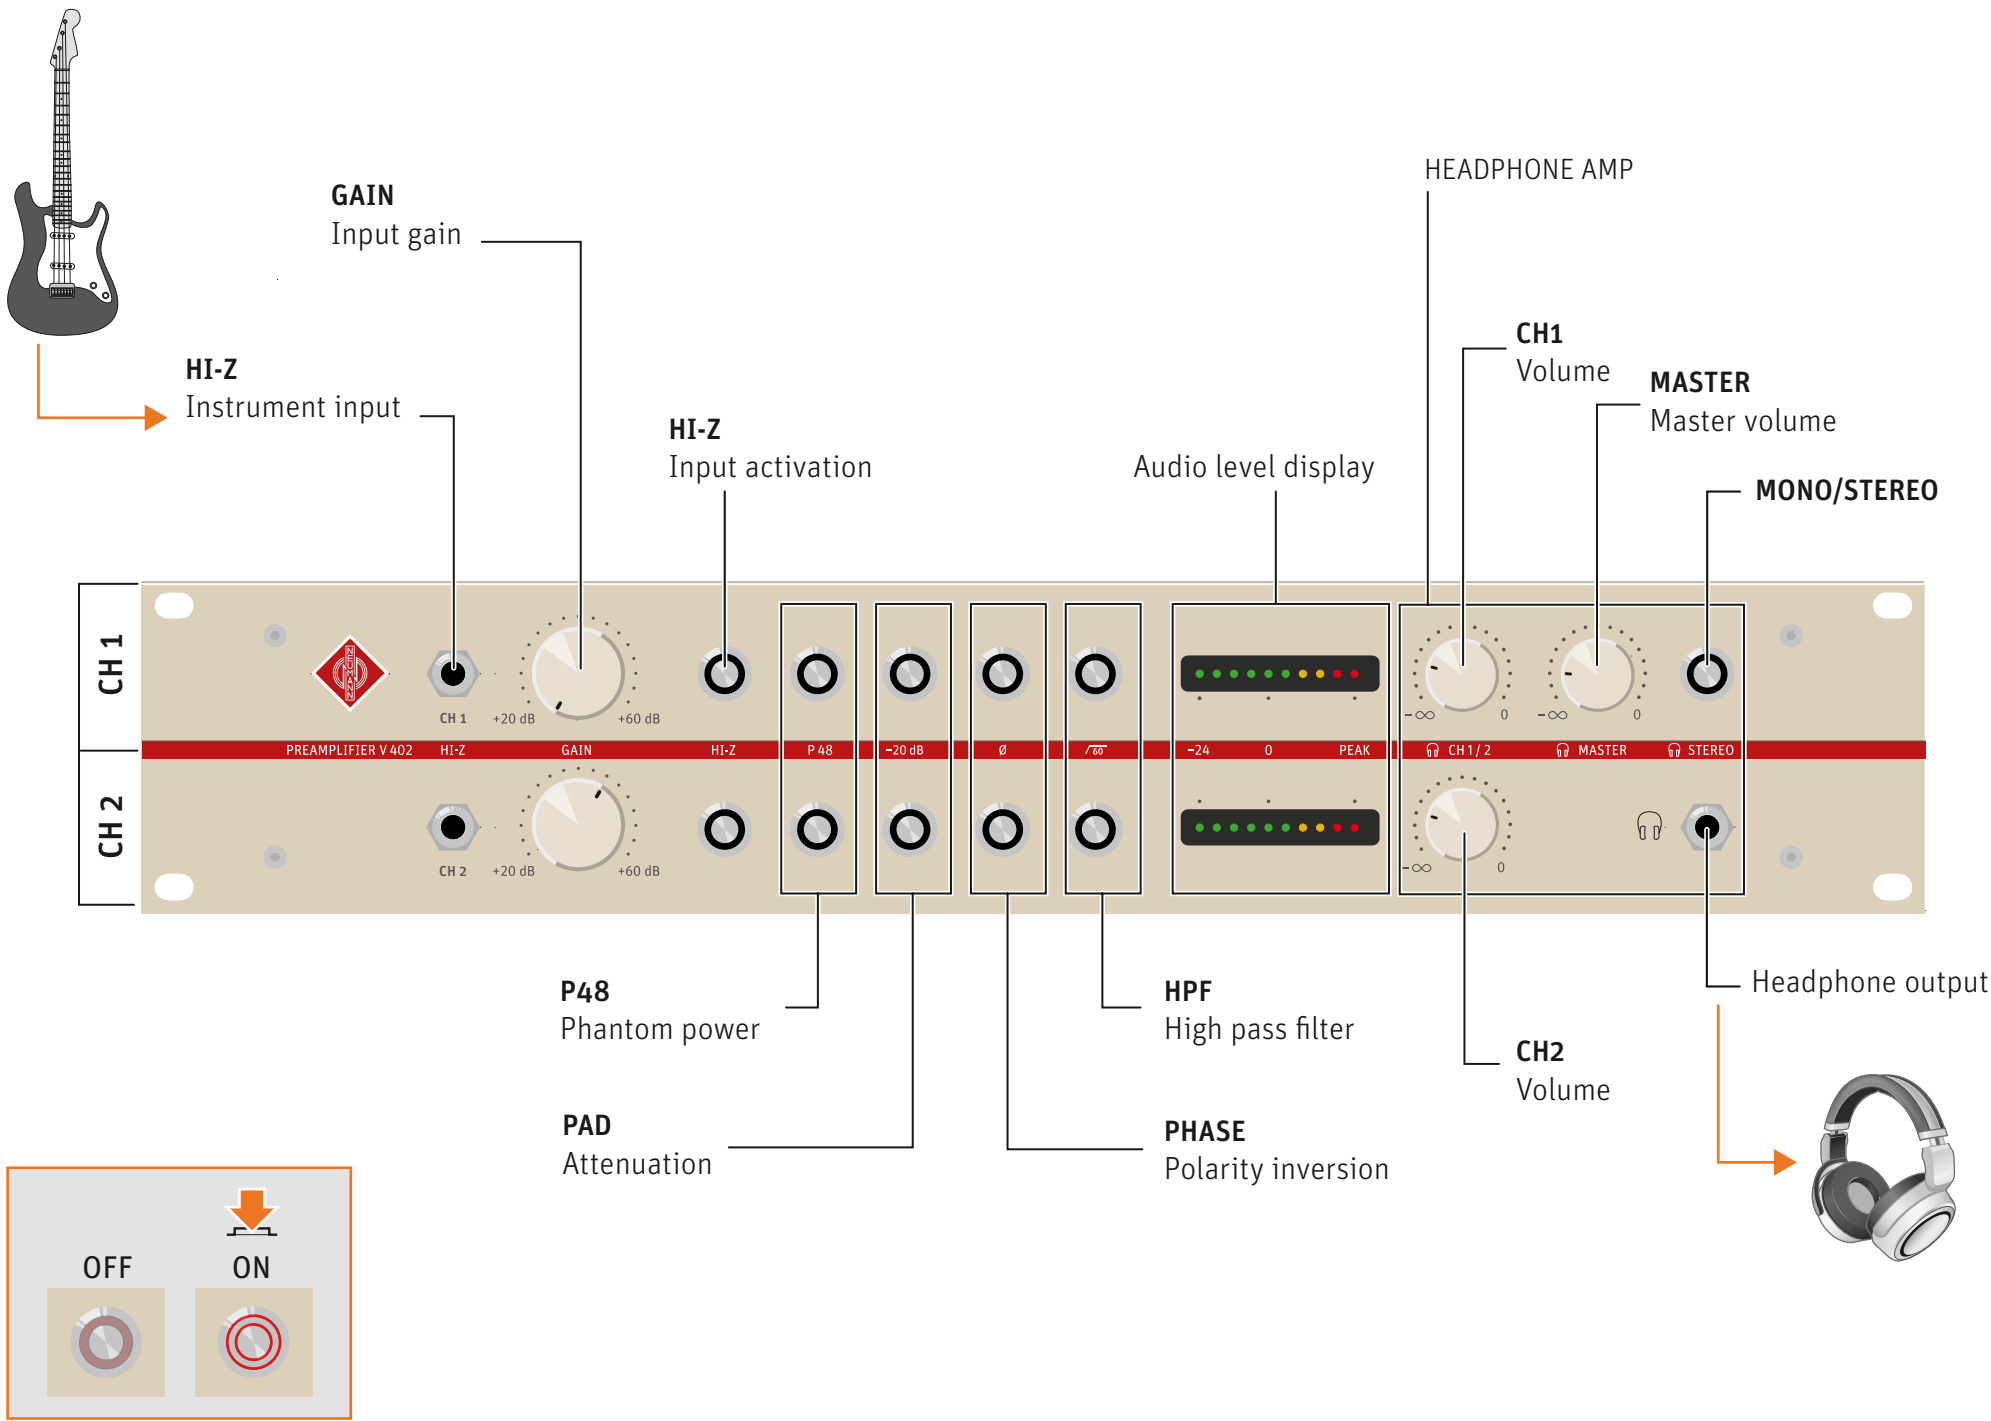

Analog Audio Inputs & Outputs / Power

